



## AC10 Variable Speed Drive

For Simple, Reliable Motor Control in General Purpose Applications

0.25 - 250 HP (0.2-180 kW)



ENGINEERING YOUR SUCCESS.



AC10 IP66 Drives

## **WARNING - USER RESPONSIBILITY**

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

## **OFFER OF SALE**

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance by the provisions stated in the detailed 'Offer of Sale' which is available upon request.

<b>Overview</b> .....	<b>5</b>
<b>Features</b> .....	<b>6</b>
IP20 Units.....	6
IP66 Units.....	8
<b>Applications</b> .....	<b>10</b>
<b>Technical Specifications</b> .....	<b>11</b>
Power Ratings.....	11
Electrical Characteristics .....	12
Environmental Characteristics.....	12
Standards and Conformance .....	12
Dimensions .....	12
Connections .....	15
<b>Software</b> .....	<b>16</b>
<b>Accessories and Options</b> .....	<b>17</b>
Remote Mounting Keypad.....	17
Cloning Module .....	17
Line Reactors.....	18
Line Fuses.....	19
Dynamic Braking Resistors .....	20
<b>Order Code/Part Number Table</b> .....	<b>21</b>



AC10 IP20 Drives

# Parker Hannifin

The global leader in motion and control technologies and systems

## Global Partnerships Global Support

Parker is committed to helping make our customers more productive and more profitable through our global offering of motion and control products and systems. In an increasingly competitive global economy, we seek to develop customer relationships as technology partnerships. Working closely with our customers, we can ensure the best selection of technologies to suit the needs of our customers' applications.



## Electromechanical Technologies for High Dynamic Performance and Precision Motion

Parker electromechanical technologies form an important part of Parker's global motion and control offering. Electromechanical systems combine high performance speed and position control with the flexibility to adapt the systems to the rapidly changing needs of the industries we serve.



## Electromechanical and Drives Division Manufacturing

Parker drive products are manufactured globally to provide our customers with quality products at a competitive price point. In addition to factory-direct support, Parker provides sales assistance and local technical support through a group of dedicated sales teams and a network of authorized systems integrators, field service engineers, and technical distributors across the globe. For contact information, please refer to the Sales Offices listed on the back cover of this document or visit [www.parker.com/emdusa](http://www.parker.com/emdusa)



Rohnert Park, CA



Wuxi, China



Chennai, India

# Variable Speed Drive - AC10 Series

## Overview

### Description

AC10 Variable Frequency Drive is a simple, reliable and economical solution to every-day motor control applications requiring speed or torque control within the power range of 0.25 HP to 250 HP, with NEMA 4X indoor/IP66 version available through 125 HP. Having features normally only associated with higher specification drives, including sensorless vector mode, output frequency up to 590 Hz, and a full 150% overload at 0.5 Hz for 1 minute, AC10 provides an optimized solution for OEM machine builders looking for a compact, cost-effective drive without compromising on performance. The AC10 is suitable for AC induction motor designs.

### Features

#### Simplicity

AC10 is designed to reduce the time and effort required to install, setup and commission through its easy to use integrated keypad. Minimal wiring requirements and two easily accessed terminal rails make AC10 fast and simple to install, having you up and running in no time at all. Auto-tuning sensorless vector mode takes AC10 beyond simple V/Hz control allowing users requiring greater dynamic speed or torque control for their application to benefit from the drives enhanced 0.5% speed and 5% torque accuracy.

#### Reliability

Proven technology and manufacturing techniques ensure AC10 has been engineered and built to deliver consistently outstanding levels of performance day in, day out ensuring maximum uptime and productivity. Thanks to its conformally coated PC boards, AC10 is able to withstand even the most severe class 3C3 environment which many other drives in this class would struggle with, allowing you to operate AC10 with the utmost confidence in more applications. For the ultimate in protection, IP66 rated models are available.



IP20 Model



IP66 Model




Through 20 HP

### Technical Characteristics - Overview

Enclosure	IP20		NEMA 4X indoor/ IP66
	<b>Power Range</b>	0.25-30 HP (0.2-22 kW)	40-250 HP (30-180 kW)
<b>Power Supply</b>	220V - 240V ±15% Single Phase 220V - 240V ±15% Three Phase 380V - 480V +10%/-15% Three Phase		
<b>Input Frequency</b>	50/60 Hz		
<b>Operating Temperature</b>	0-40°C		0-50°C
<b>Analog Inputs</b>	2x (0-10 V, 0-5 V, 0-20 mA, 4-20 mA)		
<b>Analog Outputs</b>	1x (0-10 V, 0-20 mA)	2x (0-10 V, 0-20 mA)	1x (0-10 V, 0-20 mA)
<b>Digital Inputs</b>	5x 24 VDC	8x 24 VDC	5x 24 VDC
<b>Digital Outputs</b>	1x 24 VDC	2x 24 VDC	1x 24 VDC
<b>Relay Output</b>	1x 2 A @230 VAC		

# IP20 Units Through 250 HP




## AC10 Drives Range

One of the smallest micro-drives available and with eleven different frame sizes covering a power range of 0.25 HP through to 250 HP, AC10 is a low-cost, compact solution for simple AC induction motor control in a wide range of applications across a host of different industries.



## Suited to harsh environments

- Optional Internal EMC filter allows use in C3 industrial environments
- Conformal coating provides protection in arduous class 3C3 environments
- 50°C operating temperature (Derate over 40°C)
- Fan-cooled heatsink, convection cooled electronics




## Modbus/RS485 communication

- Connection to Parker DSELite drive setup and monitoring tools and AC10 Cloning Module
- Connection to PLC or other Modbus RTU/RS485 network



## Flexible I/O

- Flexible digital inputs and outputs, and relay output to suit your application needs
- 1 analog output (2 on units 40HP and higher) and 2 analog inputs for connection to speed potentiometers and panel meters
- Internal dynamic brake switch as standard

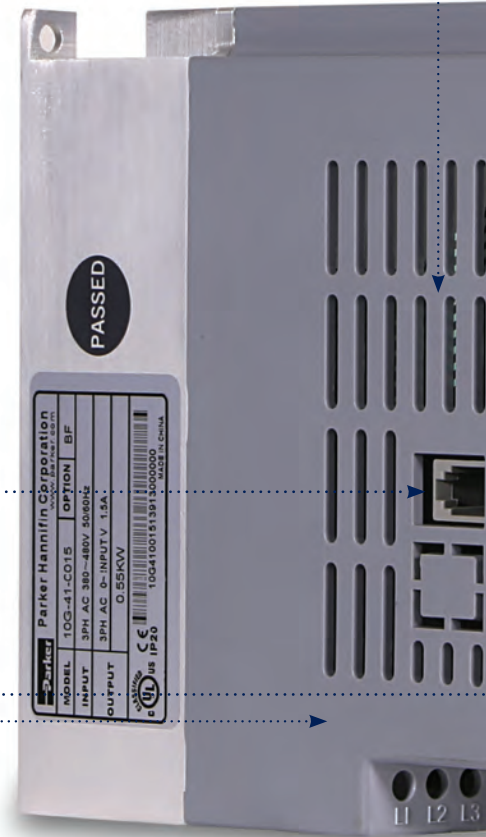

## Extra power when it's needed

- 150% overload for 60 seconds at 0.5 Hz to provide extra starting torque for high inertia loads
- Output power can be up-rated for operation in lower ambient temperatures





### Simple or enhanced performance

- Simple V/Hz control for general energy saving applications
- Enhanced auto-tuning sensorless vector control providing higher dynamic performance for applications requiring greater speed or torque accuracy



### All at the touch of a button

- Standard ergonomic keypad providing full access to all drive functions
- 4 LEDs provide instant indication of drive status
- Remote mountable keypad option for ease of setup and operation
- Simple out of the box operation thanks to integrated macros and quick start guide



IP20 Keypad

### Control at your fingertips

Every AC10 comes complete with an ergonomic operator keypad as standard, featuring LED drive status indicators, a display and a tactile membrane style keypad.

In addition to displaying operating status and running information, the display is also used to access drive configuration parameters which can be quickly and easily changed via the keypad. A three level menu structure ensures that configuration is simple and organized.


The keypad can also be used to take local control of the motor to start, stop, increase or decrease motor speed.

An optional remote mounting keypad is also available for IP20 units, providing the same functionality as the drive mounted keypad.




### High Speed Operation

- Up to 590 Hz output for high speed operations such as spindles, centrifuges, mixers etc.



### Choice of operating voltages


- 230V single and three phase input up to 20 HP
- 480V three phase input from 0.25 HP through 250 HP



### Compact Dimensions

- When compared to other micro drives of similar functionality, AC10 is noticeably more compact reducing cabinet space and freeing up valuable floor space.

# IP66 Units Through 125 HP



## AC10 IP66/NEMA4X

IP66/NEMA 4X (indoor) apply to IEC standard 60529-2004 and NEMA standards, and assess the capability of an enclosure to resist specific environmental conditions. IP66/NEMA 4X protection represents dust tight performance as well as the ability to withstand powerful water jets from all directions. Parker's AC10 IP66/NEMA 4X series offers all the great benefits of the AC10 series drives but with added environmental protection.



### Suited to harsh, wet, and dusty environments

- Robust NEMA 4X indoor/IP66 enclosure for direct mounting in dusty or moist environments
- Optional Internal EMC filter allows use in C3 industrial environments
- Conformal coating provides protection in arduous class 3C3 environments
- 50°C operating temperature

### Flexible Connections

- Flexible digital inputs and outputs, and relay output to suit your application needs
- Internal dynamic brake switch as standard
- Easy user access with removable "gland plate"
- Clone module connection



### Modbus/RS485 communication

- Connection to Parker DSELite drive setup and monitoring tools
- Connection to PLC or other Modbus RTU/RS485 network



### Extra power when it's needed

- 150 % overload for 60 seconds at 0.5 Hz to provide extra starting torque for high inertia loads



Through 20 HP





### Simple or enhanced performance

- Simple V/Hz control for general energy saving applications
- Enhanced auto-tuning sensorless vector control providing higher dynamic performance for applications requiring greater speed or torque accuracy



### All at the touch of a button

- NEMA 4/IP66 ergonomic keypad providing full access to all drive functions
- Simple out of the box operation thanks to integrated macros and quick start guide



IP66 Keypad

### Control at your fingertips

AC10 comes complete with an ergonomic operator keypad as standard, featuring LED drive status indicators, a display and a tactile membrane style keypad.


In addition to displaying operating status and running information, the display is also used to access drive configuration parameters which can be quickly and easily changed via the keypad. A three level menu structure ensures that configuration is simple and organized.

The keypad can also be used to take local control of the motor to start, stop, increase or decrease motor speed.



### High Speed Operation

- Up to 590 Hz output for high speed operations such as spindles, centrifuges, mixers etc.



### Choice of operating voltages

- 230V single and three phase input up to 3 HP
- 480V three phase input from 0.25 HP through 125 HP


# Applications

AC10 provides a simple approach to general purpose industrial motor control applications across a wide range of industries, giving users the benefits of the inherent energy-saving properties of using a variable speed drive, as well as the improved reliability and extended service life benefits associated with smoother starting and stopping of regularly cycling loads.

Making use of pre-defined control logic, **Application Macros** enable users to quickly configure the AC10 for control of one of a number of pre-defined functions. Information is presented to the user in a template format which can then be simply and easily populated with the specific details of the application.

## Typical applications for AC10 include...

- Conveyors
- Centrifuges
- Fans
- Mixers
- Packaging Machines
- Textile Machines
- Pumps
- Strapping Machines
- Labeling Machines
- Industrial Washing Machines
- Machine Tool Spindles
- Food and Beverage

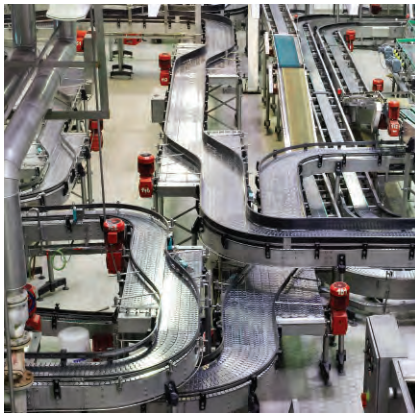


Conveyors



Fans




Mixers

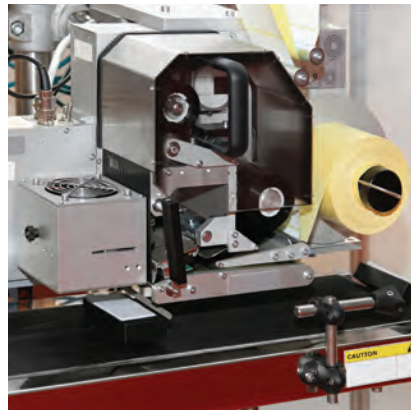


Packaging Machines

## AC10 Standard Application Macros include...




### BASIC SPEED CONTROL

Set speed and voltage or current with start/stop direction control




### AUTOMATIC/MANUAL CONTROL

Set to run with local speed setting or external reference




### PRESET SPEED CONTROL

Select up to 8 pre-programmed speeds using digital inputs

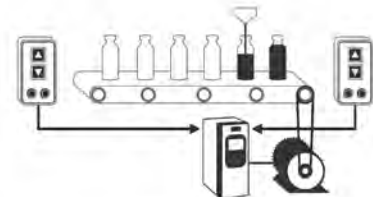

### RAISE/LOWER

Increase or reduce speed using digital inputs



Speed Setpoint      Pressure or Volume Feedback

### PID CONTROL

Control the pressure, flow, temperature or any process variable

# Technical Specifications

## Power Ratings - IP20



230V Single Phase Input				
Part Number	Nominal Power		Output Current [A]	Frame Size
	HP	kW		
10G-11-0015-BN	0.25	0.2	1.4	1
10G-11-0025-BN	0.5	0.4	2.4	1
10G-11-0035-BN	0.75	0.55	3.3	1
10G-11-0045-BN	1	0.75	4.3	1
10G-12-0050-BN	1.5	1.1	4.8	2
10G-12-0070-BN	2	1.5	6.7	2
10G-12-0100-BN	3	2.2	9.6	2

230V Three Phase Input				
Part Number	Nominal Power		Output Current [A]	Frame Size
	HP	kW		
10G-31-0015-BN	0.25	0.2	1.4	1
10G-31-0025-BN	0.5	0.4	2.4	1
10G-31-0035-BN	0.75	0.55	3.3	1
10G-31-0045-BN	1	0.75	4.3	1
10G-32-0050-BN	1.5	1.1	4.8	2
10G-32-0070-BN	2	1.5	6.7	2
10G-32-0100-BN	3	2.2	9.6	2
10G-33-0170-BN	5	4	17	3
10G-34-0210-BN	7.5	5.5	21	4
10G-35-0300-BN	10	7.5	30	5
10G-35-0400-BN	15	11	40	5
10G-36-0550-BN	20	15	55	6

480V Three Phase Input				
Part Number	Nominal Power		Output Current [A]	Frame Size
	HP	kW		
10G-41-0006-BN	0.25	0.2	0.5	1
10G-41-0010-BN	0.5	0.4	0.9	1
10G-41-0015-BN	0.75	0.55	1.3	1
10G-42-0020-BN	1	0.75	1.7	2
10G-42-0030-BN	1.5	1.1	2.6	2
10G-42-0040-BN	2	1.5	3.5	2
10G-42-0065-BN	3	2.2	5.7	2
10G-43-0090-BN	5	4	7.8	3
10G-43-0120-BN	7.5	5.5	10	3
10G-44-0170-BN	10	7.5	15	4
10G-44-0230-BN	15	11	20	4
10G-45-0320-BN	20	15	28	5
10G-45-0380-BN	25	18.5	33	5
10G-45-0440-BN	30	22	38	5
10G-46-0600-BN	40	30	52	6
10G-47-0750-BN	50	37	65	7
10G-47-0900-BN	60	45	78	7
10G-48-1100-BN	75	55	96	8
10G-48-1500-BN	100	75	130	8
10G-49-1800-BN	125	90	157	9
10G-49-2200-BN	150	110	191	9
10G-410-2650-BN	200	132	230	10
10G-411-3200-BN	225	160	278	11
10G-411-3600-BN	250	180	313	11

## Power Ratings - IP66



230V Single Phase Input				
Part Number	Nominal Power		Output Current [A]	Frame Size
	HP	kW		
16G-11-0025-BN	0.5	0.4	2.4	1
16G-11-0045-BN	1	0.75	4.3	1
16G-11-0070-BN	2	1.5	6.7	1
16G-11-0100-BN	3	2.2	9.6	1

230V Three Phase Input				
Part Number	Nominal Power		Output Current [A]	Frame Size
	HP	kW		
16G-31-0025-BN	0.5	0.4	2.4	1
16G-31-0045-BN	1	0.75	4.3	1
16G-31-0070-BN	2	1.5	6.7	1
16G-31-0100-BN	3	2.2	9.6	1

480V Three Phase Input				
Part Number	Nominal Power		Output Current [A]	Frame Size
	HP	kW		
16G-41-0020-BN	1	0.75	1.7	1
16G-41-0040-BN	2	1.5	3.5	1
16G-41-0065-BN	2	2.2	5.7	1
16G-41-0090-BN	5	4	7.8	1
16G-42-0120-BN	7.5	5.5	10	2
16G-42-0170-BN	10	7.5	15	2
16G-43-0230-BN	15	11	20	3
16G-43-0320-BN	20	15	28	3
16G-44-0380-BN	25	18.5	33	4
16G-44-0440-BN	30	22	38	4
16G-44-0600-BN	40	30	52	4
16G-45-0750-BN	50	37	65	5
16G-45-0900-BN	60	45	78	5
16G-45-1100-BN	75	55	96	5
16G-46-1500-BN	100	75	130	6
16G-46-1800-BN	125	90	157	6

UL applies to IP66 units through 20 HP

## Electrical Specifications

<b>Power Supply</b>	1 ph 220V-240V ±15%, 3 ph 220V-240V ±15% 3 ph 380V-480V +10%/-15%
<b>Rated Input Frequency</b>	50/60 Hz
<b>Maximum Switching Frequency</b>	10 kHz without derating
<b>Overload</b>	150% of rated current for 60 seconds, 200% of rated current for 2 seconds
<b>Output Frequency</b>	0.5-590 Hz
<b>Digital Resolution</b>	0.01 Hz
<b>Switching Frequency</b>	2-10 kHz selectable
<b>Control Mode</b>	Volts/Hertz or Sensorless Vector (SLV) Mode
<b>Earth Leakage Current</b>	>10 mA (all models)
<b>SCCR</b>	100 kA with recommended line fuses

## Environmental Characteristics

<b>Temperature Range</b>	Operating Temperature: 0-50°C, (derate above 40°C - IP20 only)
<b>Humidity</b>	Operating humidity: Below 90% Relative Humidity, non-condensing (95% for IP66)
<b>Vibration</b>	Below 0.5 g
<b>Altitude</b>	1000 m ASL
<b>Protection Degree</b>	IP20 and IP66/NEMA 4X indoor models
<b>Chemically Active Substances</b>	For the standard product, compliance with EN60271-3-3 is Class 3C3

## Standards and Conformance

<b>Overvoltage Category</b>	Overvoltage category III (numeral defining an impulse withstand level)
<b>EMC Compatibility</b>	Meets the requirements of IEC/EN61800-3 : 2004 “Adjustable speed electrical power drive systems – Part 3”
<b>Certifications</b>	UL Listed. UL508C and CSA 22.2 - All IP20 units and IP66 units through 20 HP


## Dimensions [in/mm]

IP20 Frame	Height (H)	Width (W)	Depth (D)	Weight [lb/kg]
1	5.43/138	3.15/80	5.31/135	2.76/1.25
2	7.09/180	4.17/106	5.91/150	3.88/1.76
3	9.25/235	5.43/138	5.98/152	6.53/2.96
4	10.43/265	6.14/156	6.69/170	10.80/4.9
5	13.39/340	8.07/205	7.71/196	16.53/7.5
6	17.16/435	10.43/265	9.25/235	37.48/17
7	18.90/480	12.40/315	9.21/234	55.12/25
8	21.85/555	14.17/360	10.43/265	88.19/40
9	24.80/630	16.14/410	11.81/300	121.25/55
10	30.12/765	20.32/516	12.83/326	207.24/94
11	35.83/910	22.05/560	13.46/342	264.56/120


See IP20 outline drawings on page 13

IP66 Frame	Height (H)	Width (W)	Depth (D)	Weight [lb/kg]
1	16.22/412	7.87/200	7.80/198	17.6/8.0
2	16.46/418	9.53/242	7.80/198	22.1/10.0
3	18.54/471	9.53/242	8.98/228	28.7/13.0
4	25.59/650	9.53/242	12.74/323.5	61.7/28.0
5	26.77/680	12.13/308	14.90/378.5	86.0/39.0
6	30.32/770	14.57/370	15.89/403.5	147.7/67.0


See IP66 outline drawings on page 14

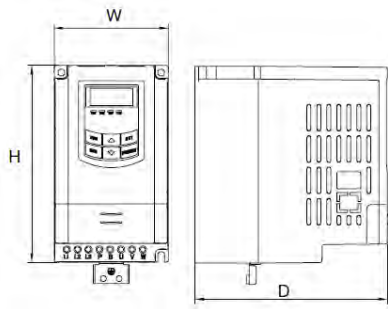


Frame 1 (IP20)

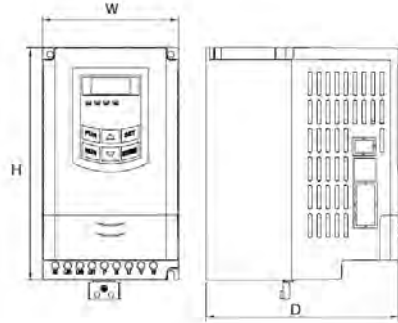


Frame 2 (IP20)

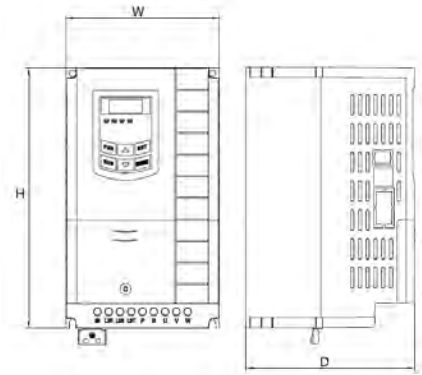


Frame 3 (IP20)

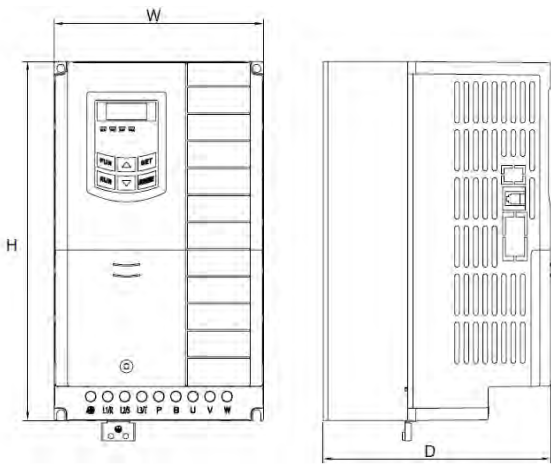

Frame 4 (IP20)

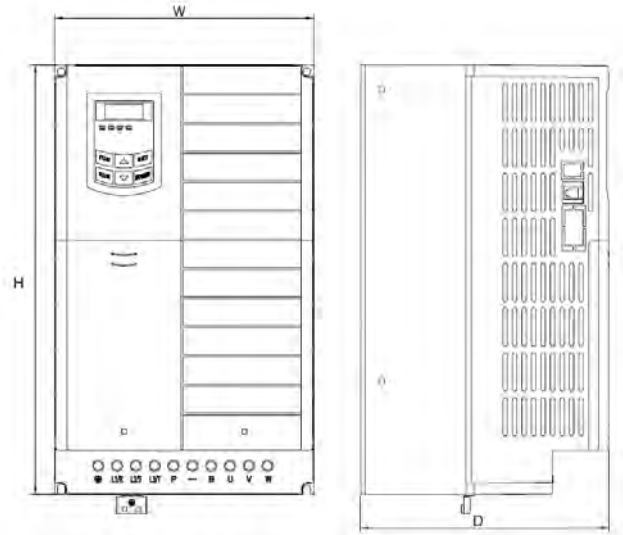


Frame 5 (IP20)

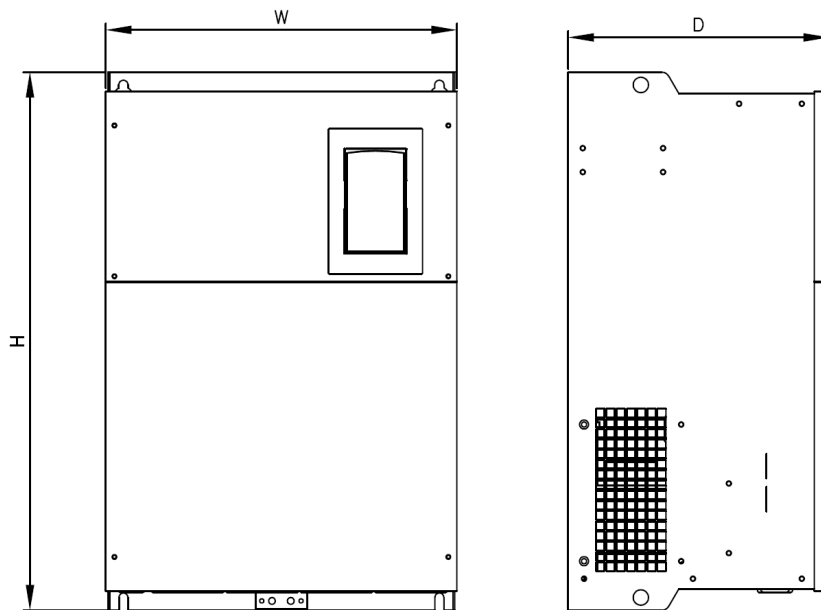


Frame 6, 7, 8, 9, 10, 11 (IP20)


# Variable Speed Drive - AC10 Dimensions




Frame 1 (IP66)

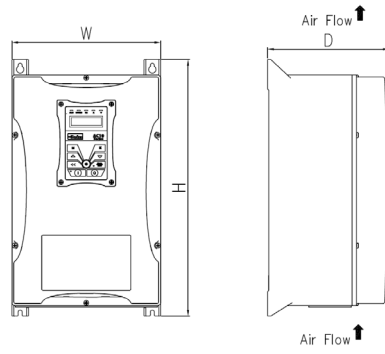


Frame 2 (IP66)

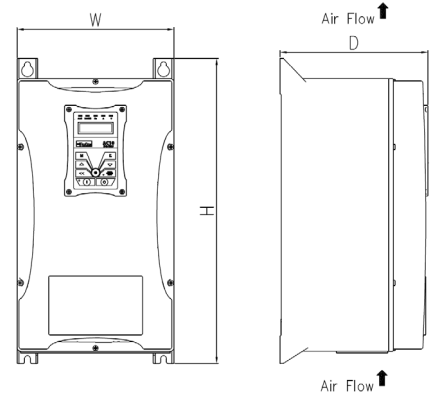


Frame 3 (IP66)

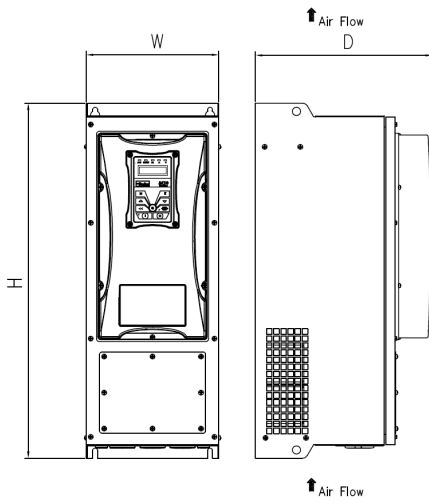

Frame 4 (IP66)

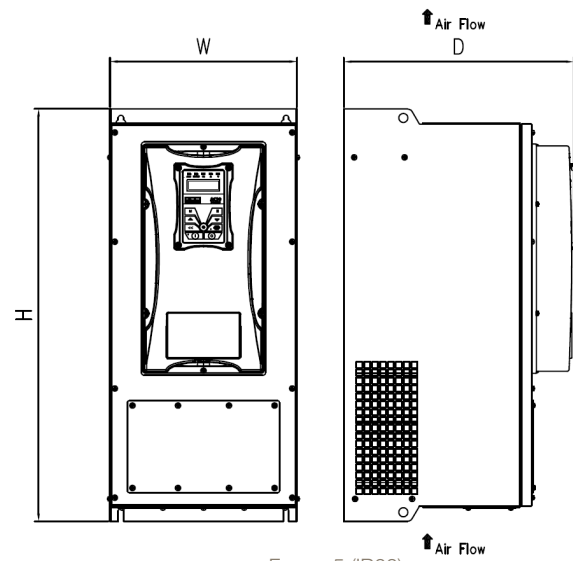

Frame 5 (IP66)

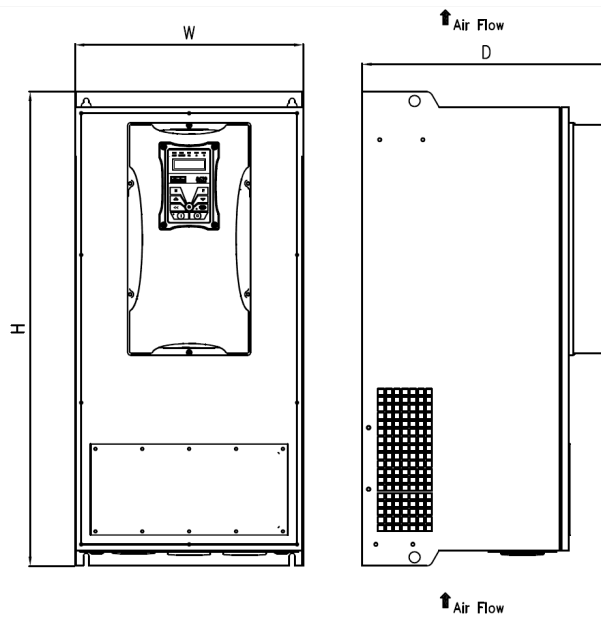

Frame 6 (IP66)


# Connections

Power Terminals	Description
L1/R	Single or three phase input L1
L2/S	Single or three phase input L2
L3/T	Three phase input L3
P	Braking Resistor
B	Braking Resistor
U	Motor Output phase 1/U
V	Motor Output phase 2/V
W	Motor Output phase 3/W

Control Terminals	Description
TA	Alarm N/O relay contact, 5A, 24V rated
TB	Alarm N/C relay contact, 5A, 24V rated
TC	Drive Alarm common
DO1	Digital Output 1
DO2	Digital Output 2 (Frames 6-11)
24V	24 VDC Power output (max 50 mA)
CM	0 V DC common
DI1	Digital Input 1
DI2	Digital Input 2
DI3	Digital Input 3
DI4	Digital Input 4
DI5	Digital Input 5
DI6	Digital Input 6 (Frames 6-11)
DI7	Digital Input 7 (Frames 6-11)
DI8	Digital Input 8 (Frames 6-11)
10V	10 V Reference supply (max 20 mA)
AI1	Analog input 1
AI2	Analog input 2
GND	Power Supply 0V
AO1	Analog Output 1
AO2	Analog Output 2 (Frame 6-11)
A+	RS485 Channel A
B-	RS485 Channel B

- Analog Input 1: (0-10 V)
- Analog Input 2: (0-10 V, 0-20 mA)
- Analog Outputs: (0-10 V, 0-20 mA)
- Digital Inputs: Nominal 24 VDC
- Digital Output: Nominal 24 VDC
- Relay Output: Volt free (dry) contact, 2A@230 VAC max

This illustration is for reference only, and may not show the connections for your specific drive. Please refer to the specific product installation manual for detailed connection diagram.

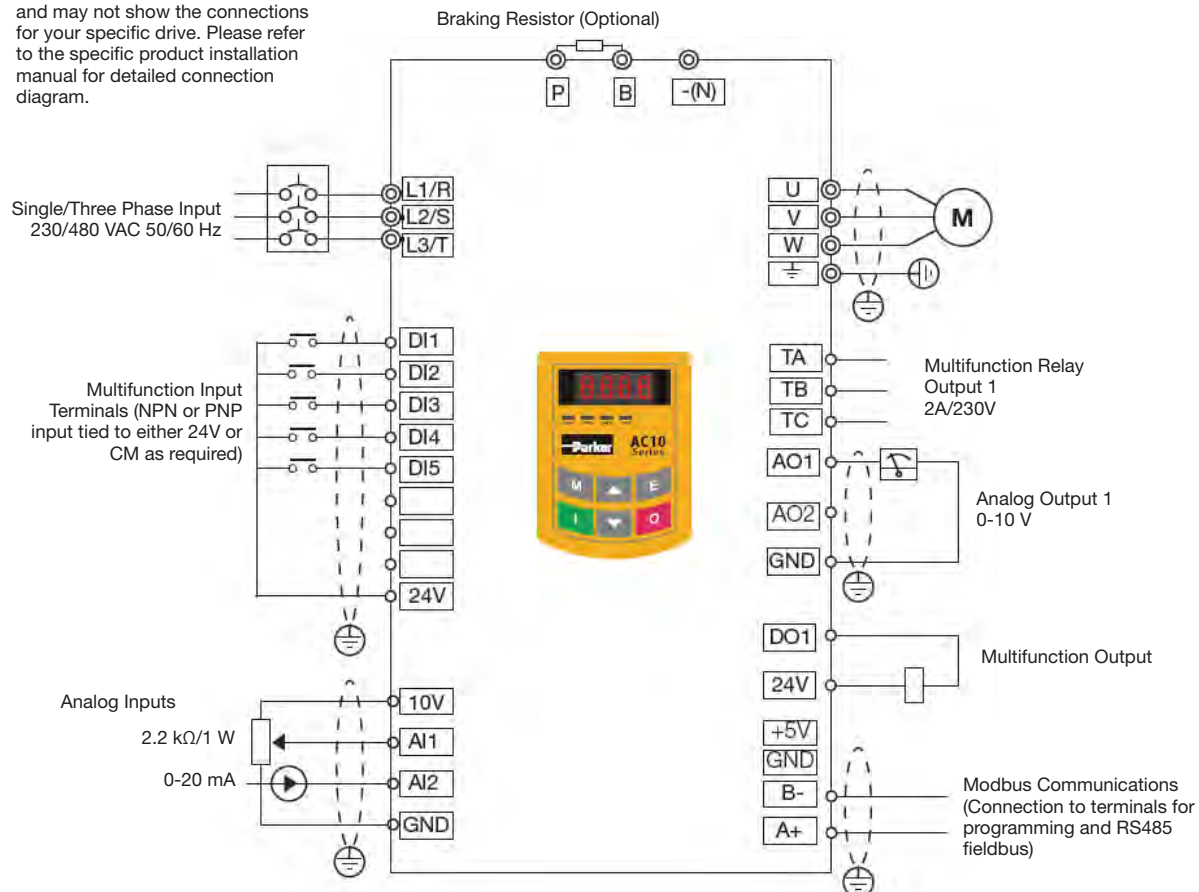



# Software

## Parker Drive System Explorer (DSE) Lite

Parker drive configuration software Drive System Explorer (DSE) Lite is an easy to use drive configuration software package, designed to make programming your application as simple as possible without compromising on functionality.

DSE Lite is based around a straightforward block programming and an intuitive user interface which supports user-defined configurations and offers real-time monitoring and charting. DSE Lite allows the user to create, parameterize and configure user defined applications as well as parameterize and connect fixed motor control blocks.

It is available free of charge to download from [www.parker.com/ssdusa/software](http://www.parker.com/ssdusa/software)

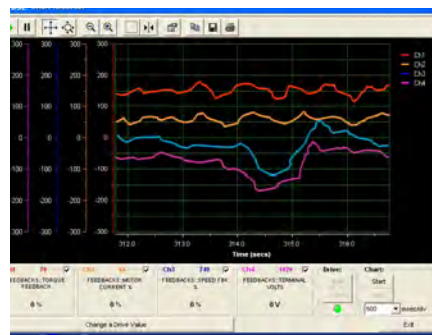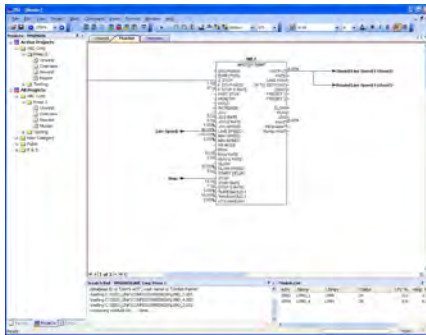



## Accessories and Options

### Remote Mounting Keypad - IP20

The remote mounting keypad (IP20) can be mounted away from the drive, such as on the door of an electrical enclosure, allowing users to configure, operate and monitor the drive without having to access the drive directly. The remote keypad provides an alternative offering the same functionality as the drive mounted keypad but can be connected to the drive via a 1.5 m cable plugged into the port on the left hand side of the drive.

Order Code	Description
1001-00-00	Remote Keypad (AC10 IP20 only)
1001-01-00	Extension cable (1.5m)



### Remote Mounting Keypad - IP66

The remote mounting keypad (IP66) can be mounted away from the IP66 drive, allowing users to configure, operate and monitor the drive without having to access the drive directly. The remote keypad provides an alternative offering the same functionality as the drive mounted keypad but can be connected to the drive via a 1.5 m cable with IP66 plugs. For use with IP66 drives only.

Order Code	Description
1601-00-00	Remote Keypad (AC10 IP66 only)
1602-01-00	Extension cable (1.5m)



### Cloning Module

Allows users to copy applications between drives and upload/download parameter sets.

Order Code	Description
1002-00-00	Cloning Module



### Power Disconnect

Available on IP66 units through 20 HP, this option provides a means to disconnect AC power from the drive. It includes a lock-out enabled handle.

Order Code	Description
Consult factory	Power Disconnect



## Accessories and Options

### Three Phase Line Reactor

Line reactors can help limit input harmonics and act as a current limiting device. They help protect the AC10 from potentially harmful power line disturbances.

AC10 (IP20) Part Number	AC10 (IP66) Part Number	HP (230V)	Line Reactor Part Number	Inductance [mH]
10G-31-0015-BN	-	0.25	CO473957U016	6.9
10G-31-0025-BN	16G-31-0025-BN	0.5	CO473957U021	5.3
10G-31-0035-BN	-	0.75	CO473957U034	3.2
10G-31-0045-BN	16G-31-0045-BN	1	CO473957U048	2.3
10G-32-0050-BN	-	1.5	CO473958U110	2.1
10G-32-0070-BN	16G-31-0070-BN	2	CO473957U076	1.5
10G-32-0100-BN	16G-31-0100-BN	3	CO473957U110	1
10G-33-0170-BN	-	5	CO353012	0.8
10G-34-0210-BN	-	7.5	CO353013	0.5
10G-35-0300-BN	-	10	CO353014	0.4
10G-35-0400-BN	-	15	CO353015	0.3
10G-36-0500-BN	-	20	CO353016	0.25

Note: Accessories and options are not IP66 rated.

AC10 (IP20) Part Number	AC10 (IP66) Part Number	HP (480V)	Line Reactor Part Number	Inductance [mH]
10G-41-0006-BN	-	0.25	CO473958U010	33
10G-41-0010-BN	-	.5	CO473958U011	21
10G-41-0015-BN	-	.75	CO473958U016	14
10G-42-0020-BN	16G-41-0020-BN	1	CO473958U021	11
10G-42-0030-BN	-	1.5	CO473958U047	7.7
10G-42-0040-BN	16G-41-0040-BN	2	CO473958U034	6.8
10G-42-0065-BN	16G-41-0065-BN	3	CO473958U048	4.8
10G-43-0090-BN	16G-41-0090-BN	5	CO473958U076	3
10G-43-0120-BN	16G-42-0120-BN	7.5	CO473958U110	2.1
10G-44-0170-BN	16G-42-0170-BN	10	CO473958U140	1.6
10G-44-0230-BN	16G-43-0230-BN	15	CO473958U210	1.1
10G-45-0320-BN	16G-43-0320-BN	20	CO473958U280	0.82
10G-45-0380-BN	16G-44-0380-BN	25	CO473958U350	0.71
10G-45-0440-BN	16G-44-0440-BN	30	CO473958U460	0.55
10G-46-0600-BN	16G-44-0600-BN	40	CO473958U650	0.36
10G-47-0750-BN	16G-45-0750-BN	50	CO473958U650	0.36
10G-47-0900-BN	16G-45-0900-BN	60	CO473958U830	0.29
10G-48-1100-BN	16G-45-1100-BN	75	CO473958U1K0	0.23
10G-48-1500-BN	16G-46-1500-BN	100	CO473958U1K3	0.18
10G-49-1800-BN	16G-46-1800-BN	125	CO473958U1K6	0.155
10G-49-2200-BN	-	150	CO473958U2K0	0.115
10G-410-2650-BN	-	200	CO473958U2K5	0.095
10G-411-3200-BN	-	225	CO473958U3K2	0.07
10G-411-3600-BN	-	250	CO473958U4K1	0.066

## Accessories and Options

**Fuse Kits** Fuse kits provide protection on the AC line side, and include fuses and fuse blocks. Provided loose for panel mounting.

AC10 (IP20) Part Number	AC10 (IP66) Part Number	HP (230V single phase)	Fuse Kit Part Number
10G-11-0015-BN	-	0.25	LA473950U015
10G-11-0025-BN	16G-11-0025-BN	0.5	
10G-11-0035-BN	-	0.75	
10G-11-0045-BN	16G-11-0045-BN	1	LA473950U025
10G-12-0050-BN	-	1.5	
10G-12-0070-BN	16G-11-0070-BN	2	
10G-12-0100-BN	16G-11-0100-BN	3	

Note: Accessories and options are not IP66 rated.



AC10 (IP20) Part Number	AC10 (IP66) Part Number	HP (230V 3 phase)	Fuse Kit Part Number
10G-31-0015-BN	-	0.25	LA473951U015
10G-31-0025-BN	16G-31-0025-BN	0.5	
10G-31-0035-BN	-	0.75	
10G-31-0045-BN	16G-31-0045-BN	1	LA473951U025
10G-32-0050-BN	-	1.5	
10G-32-0070-BN	16G-31-0070-BN	2	
10G-32-0100-BN	16G-31-0100-BN	3	
10G-33-0170-BN	-	5	LA473951U045
10G-34-0210-BN	-	7.5	LA473951U060
10G-35-0300-BN	-	10	LA473951U080
10G-35-0400-BN	-	15	LA473951U100
10G-36-0500-BN	-	20	LA473951U125



AC10 (IP20) Part Number	AC10 (IP66) Part Number	HP (480V)	Fuse Kit Part Number
10G-41-0006-BN	-	0.25	LA473951U006
10G-41-0010-BN	-	0.5	
10G-41-0015-BN	-	0.75	
10G-42-0020-BN	16G-41-0020-BN	1	LA473951U015
10G-42-0030-BN	-	1.5	
10G-42-0040-BN	16G-41-0040-BN	2	
10G-42-0065-BN	16G-41-0065-BN	3	LA473951U030
10G-43-0090-BN	16G-41-0090-BN	5	
10G-43-0120-BN	16G-42-0120-BN	7.5	
10G-44-0170-BN	16G-42-0170-BN	10	LA473951U045
10G-44-0230-BN	16G-43-0230-BN	15	LA473951U060
10G-45-0320-BN	16G-43-0320-BN	20	LA473951U080
10G-45-0380-BN	16G-44-0380-BN	25	LA473951U090
10G-45-0440-BN	16G-44-0440-BN	30	LA473951U100
10G-46-0600-BN	16G-44-0600-BN	40	LA473951U125
10G-47-0750-BN	16G-45-0750-BN	50	LA473951U150
10G-47-0900-BN	16G-45-0900-BN	60	LA473951U200
10G-48-1100-BN	16G-45-1100-BN	75	
10G-48-1500-BN	16G-46-1500-BN	100	LA473951U300
10G-49-1800-BN	16G-46-1800-BN	125	LA473951U350
10G-49-2200-BN	-	150	LA473951U400
10G-410-2650-BN	-	200	LA473951U500
10G-411-3200-BN	-	225	LA473951U600
10G-411-3600-BN	-	250	



## Accessories and Options

### Dynamic Braking Resistors

During deceleration, or with an over-hauling load, the motor acts as a generator. Energy flows back from the motor into the DC link capacitors within the drive, causing their voltage to rise. If this voltage exceeds a maximum value, the drive will trip to protect the capacitors and internal power devices. To increase the drive's dynamic braking capability, high power resistor(s), connected across the DC link, allow the dissipation of this excess energy for short term stoppage or braking.

Note: Accessories and options are not IP66 rated.

AC10 (IP20) Part Number	AC10 (IP66) Part Number	HP Rating	DB Kit Part Number	Resistance [Ohms]	Power [W]
10G-11-XXXX-BN	16G-11-XXXX-BN	All	LA471357	100	200
10G-31-0015-BN	-	0.25	LA471357	100	200
10G-31-0025-BN	16G-31-0025-BN	0.5			
10G-31-0035-BN	-	0.75	LA471358	56	200
10G-31-0045-BN	16G-31-0045-BN	1			
10G-32-0050-BN	-	1.5			
10G-32-0070-BN	16G-31-0070-BN	2	LA471406	30	368
10G-32-0100-BN	16G-31-0100-BN	3			
10G-33-0170-BN	-	5	LA471364	18	1123
10G-34-0210-BN	-	7.5			
10G-35-0300-BN	-	10	LA471364	18	1123
10G-35-0400-BN	-	15			
10G-36-0500-BN	-	20			


AC10 (IP20) Part Number	AC10 (IP66) Part Number	HP Rating	DB Kit Part Number	Resistance [Ohms]	Power [W]
10G-41-0006-BN	-	0.25	LA471353	500	60
10G-41-0010-BN	-	0.5			
10G-41-0015-BN	-	0.75			
10G-42-0020-BN	16G-41-0020-BN	1	LA471355	200	100
10G-42-0030-BN	-	1.5			
10G-42-0040-BN	16G-41-0040-BN	2			
10G-42-0065-BN	16G-41-0065-BN	3	LA471357	100	200
10G-43-0090-BN	16G-41-0090-BN	5.0			
10G-43-0120-BN	16G-42-0120-BN	7.5	LA471359	56	500
10G-44-0170-BN	16G-43-0230-BN	15			
10G-44-0230-BN	16G-43-0320-BN	20	LA471361	30	750
10G-45-0320-BN	16G-44-0380-BN	25			
10G-45-0380-BN	16G-44-0440-BN	30	LA471362	25	756
10G-45-0440-BN	16G-44-0600-BN	40			
10G-46-0600-BN	16G-44-0600-BN	40	LA471365	15	1135
10G-47-0750-BN	16G-45-0750-BN	50			
10G-47-0900-BN	16G-45-0900-BN	60	LA471367	8	1502
10G-48-1100-BN	16G-45-1100-BN	75			
10G-48-1500-BN	16G-46-1500-BN	100	LA471369	6	2258
10G-49-1800-BN	16G-46-1800-BN	125			
10G-49-2200-BN	-	150			
10G-410-2650-BN	-	200			
10G-411-3200-BN	-	225			
10G-411-3600-BN	-	250			




# Order Code

AC10

	1	2		3	4		5		6	7
Order example	10	G	-	1	1	-	0015	-	B	N

<b>1</b>	<b>Product Family</b>		
10	AC10 VFD - IP20		
<b>2</b>	<b>Industry</b>		
G	General Purpose		
<b>3</b>	<b>Voltage</b>		
1	230V Single Phase		
3	230V Three Phase		
4	480V Three Phase		
<b>4, 5</b>	<b>Frame Size, Rated Current</b>		
<b>230V Supply</b>			
1-0015	0.25 HP/0.2 kW		
1-0025	0.5 HP/0.4 kW		
1-0035	0.75 HP/0.55 kW		
1-0045	1 HP/0.75 kW		
2-0050	1.5 HP/1.1 kW		
2-0070	2 HP/1.5 kW		
2-0100	3 HP/2.2 kW		
3-0170 *	5 HP/3.7 kW		
4-0210 *	7.5 HP/5.5 kW		
5-0300 *	10 HP/7.5 kW		
5-0400 *	15 HP/11 kW		
6-0500 *	20 HP/15 kW		
<b>480V Supply</b>			
1-0006	0.25 HP/0.2 kW		
1-0010	0.5 HP/0.4 kW		
1-0015	0.75 HP/0.55 kW		
2-0020	1 HP/0.75 kW		
2-0030	1.5 HP/1.1 kW		
2-0040	2 HP/1.5 kW		
2-0065	3 HP/2.2 kW		
3-0090	5 HP/4.0 kW		
3-0120	7.5 HP/5.5 kW		
4-0170	10 HP/7.5 kW		
4-0230	15 HP/11 kW		
5-0320	20 HP/15 kW		
5-0380	25 HP/18.5 kW		
5-0440	30 HP/22 kW		
6-0600	40 HP/30 kW		
7-0750	50 HP/37 kW		
7-0900	60 HP/45 kW		
8-1100	75 HP/55 kW		
8-1500	100 HP/75 kW		
9-1800	125 HP/90 kW		
9-2200	150 HP/110 kW		
10-2650	200 HP/132 kW		
11-3200	225 HP/160 kW		
11-3600	250 HP/180 kW		
<b>6</b>	<b>Braking Module</b>		
B	Braking Module Installed		
<b>7</b>	<b>EMC Filter</b>		
N	No Filter Installed		
F	C3 EMC Filter Installed		

<b>1</b>	<b>Product Family</b>		
16	AC10 VFD - IP66		
<b>2</b>	<b>Industry</b>		
G	General Purpose		
<b>3</b>	<b>Voltage</b>		
1	230V Single Phase		
3	230V Three Phase		
4	480V Three Phase		
<b>4, 5</b>	<b>Frame Size, Rated Current</b>		
<b>230V Supply</b>			
1-0025	0.5 HP/0.4 kW		
1-0045	1 HP/0.75 kW		
1-0070	2 HP/1.5 kW		
1-0100	3 HP/2.2 kW		
<b>480V Supply</b>			
1-0020	1 HP/0.75 kW		
1-0040	2 HP/1.5 kW		
1-0065	3 HP/2.2 kW		
1-0090	5 HP/4.0 kW		
2-0120	7.5 HP/5.5 kW		
2-0170	10 HP/7.5 kW		
3-0230	15 HP/11 kW		
3-0320	20 HP/15 kW		
4-0380 **	25 HP/18.5 kW		
4-0440 **	30 HP/22 kW		
4-0600 **	40 HP/30 kW		
5-0750 **	50 HP/37 kW		
5-0900 **	60 HP/45 kW		
5-1100 **	75 HP/55 kW		
6-1500 **	100 HP/75 kW		
6-1800 **	125 HP/90 kW		
<b>6</b>	<b>Braking Module</b>		
B	Braking Module Installed		
<b>7</b>	<b>EMC Filter</b>		
N	No Filter Installed		
F	C3 EMC Filter Installed		

\* Rating available with three phase input only

\*\* Rating not UL listed





# Parker Worldwide

**AE – UAE, Dubai**

Tel: +971 4 8127100  
parker.me@parker.com

**AR – Argentina, Buenos Aires**

Tel: +54 3327 44 4129

**AT – Austria, Wiener Neustadt**

Tel: +43 (0)2622 23501-0  
parker.austria@parker.com

**AT – Eastern Europe, Wiener Neustadt**

Tel: +43 (0)2622 23501 900  
parker.easteurope@parker.com

**AU – Australia, Castle Hill**

Tel: +61 (0)2-9634 7777

**AZ – Azerbaijan, Baku**

Tel: +994 50 2233 458  
parker.azerbaijan@parker.com

**BE/LU – Belgium, Nivelles**

Tel: +32 (0)67 280 900  
parker.belgium@parker.com

**BR – Brazil, Cachoeirinha RS**

Tel: +55 51 3470 9144

**BY – Belarus, Minsk**

Tel: +375 17 209 9399  
parker.belarus@parker.com

**CA – Canada, Milton, Ontario**

Tel: +1 905 693 3000

**CH – Switzerland, Etoy**

Tel: +41 (0)21 821 87 00  
parker.switzerland@parker.com

**CL – Chile, Santiago**

Tel: +56 2 623 1216

**CN – China, Shanghai**

Tel: +86 21 2899 5000

**CZ – Czech Republic, Klecany**

Tel: +420 284 083 111  
parker.czechrepublic@parker.com

**DE – Germany, Kaarst**

Tel: +49 (0)2131 4016 0  
parker.germany@parker.com

**DK – Denmark, Ballerup**

Tel: +45 43 56 04 00  
parker.denmark@parker.com

**ES – Spain, Madrid**

Tel: +34 902 330 001  
parker.spain@parker.com

**FI – Finland, Vantaa**

Tel: +358 (0)20 753 2500  
parker.finland@parker.com

**FR – France, Contamine s/Arve**

Tel: +33 (0)4 50 25 80 25  
parker.france@parker.com

**GR – Greece, Athens**

Tel: +30 210 933 6450  
parker.greece@parker.com

**HK – Hong Kong**

Tel: +852 2428 8008

**HU – Hungary, Budapest**

Tel: +36 1 220 4155  
parker.hungary@parker.com

**IE – Ireland, Dublin**

Tel: +353 (0)1 466 6370  
parker.ireland@parker.com

**IN – India, Mumbai**

Tel: +91 022 4124 2500  
reception.india@parker.com

**IT – Italy, Corsico (MI)**

Tel: +39 02 45 19 21  
parker.italy@parker.com

**JP – Japan, Tokyo**

Tel: +81 (0)3 6408 3901

**KR – South Korea, Seoul**

Tel: +82 2 559 0400

**KZ – Kazakhstan, Almaty**

Tel: +7 7272 505 800  
parker.easteurope@parker.com

**LV – Latvia, Riga**

Tel: +371 6 745 2601  
parker.latvia@parker.com

**MX – Mexico, Apodaca**

Tel: +52 81 8156 6000

**MY – Malaysia, Shah Alam**

Tel: +60 3 7849 0800

**NL – The Netherlands, Oldenzaal**

Tel: +31 (0)541 585 000  
parker.nl@parker.com

**NO – Norway, Ski**

Tel: +47 64 91 10 00  
parker.norway@parker.com

**NZ – New Zealand, Mt Wellington**

Tel: +64 9 574 1744

**PL – Poland, Warsaw**

Tel: +48 (0)22 573 24 00  
parker.poland@parker.com

**PT – Portugal, Leca da Palmeira**

Tel: +351 22 999 7360  
parker.portugal@parker.com

**RO – Romania, Bucharest**

Tel: +40 21 252 1382  
parker.romania@parker.com

**RU – Russia, Moscow**

Tel: +7 495 645-2156  
parker.russia@parker.com

**SE – Sweden, Spånga**

Tel: +46 (0)8 59 79 50 00  
parker.sweden@parker.com

**SG – Singapore**

Tel: +65 6887 6300

**SK – Slovakia, Banská Bystrica**

Tel: +421 484 162 252  
parker.slovakia@parker.com

**SL – Slovenia, Novo Mesto**

Tel: +386 7 337 6650  
parker.slovenia@parker.com

**TH – Thailand, Bangkok**

Tel: +662 717 8140

**TR – Turkey, Istanbul**

Tel: +90 216 4997081  
parker.turkey@parker.com

**TW – Taiwan, Taipei**

Tel: +886 2 2298 8987

**UA – Ukraine, Kiev**

Tel: +380 44 494 2731  
parker.ukraine@parker.com

**UK – United Kingdom, Warwick**

Tel: +44 (0)1926 317 878  
parker.uk@parker.com

**US – USA, Cleveland**

Tel: +1 216 896 3000

**VE – Venezuela, Caracas**

Tel: +58 212 238 5422

**ZA – South Africa, Kempton Park**

Tel: +27 (0)11 961 0700  
parker.southafrica@parker.com



© 2019 Parker Hannifin Corporation. All rights reserved.

**Parker Hannifin Corporation**  
**Electromechanical & Drives Division**

Tel: (800) 358-9070

Fax: (707) 584-8015

emn\_support@parker.com

www.parker.com/emdusa

AC10 Catalog HA473931  
Issue 8 Jan2020

